

CYLINDER 6.9 L

SAFER®**ultra light**
COMPOSITE CYLINDERS

Reinforcing fibers:	carbon fiber / DuPont™ Kevlar® fiber
Liner:	PET
Working pressure:	300 bar
Test pressure:	450 bar
Produced by:	PN-EN 12245-2009
Directive:	PI 2010/35/EU CE 97/23/EC
Certificate:	TÜV SÜD
Gases:	Air, O ₂ , N ₂ , CO ₂




CAPACITY	WEIGHT	DIAMETER	LENGTH	LIFE SPAN			WARRANTY	
				15 yrs	20 yrs	30 yrs		NLL
6.9 L	2,80 kg	158 mm	526 mm		x	x	x	24 months

DESCRIPTION:

The cylinder is manufactured by filament winding. Layer of carbon fiber and Kevlar® aramid filament fiber in an epoxy warp on the PET liner, allows storage of gases under high pressure. The cylinder features high barrier properties to guarantee safe gas storage. The gases stored in the cylinder are kept clean and user safe.

APPLICATION:

breathing apparatus
others

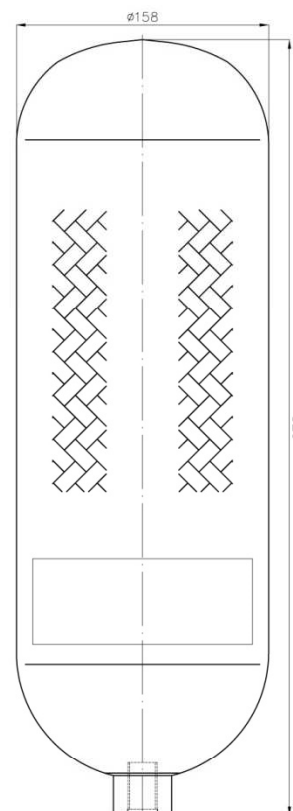

Screw thread:
M18 x 1,5 ; 17 E ;
M25 x 2 ; 25E ;
¾ NGT ; 1"-11 ½ NGT

* DuPont™ and Kevlar® are trademarks or registered trademarks of E. I. du Pont de Nemours and Company used under license to Techplast Sp. z o.o.



Techplast Sp.z.o.o
Wieprz 267
34-122 Wieprz
Poland

Production Plant
ul. Krakowska 83P
34-120 Andrychów
Poland

tel. +48 33 875 29 88
fax. +48 33 875 29 88
www.safercylinders.net

